

DS-UPS2000 UPS



- LCD display
- Wide input voltage range
- Built-in AVR
- Super fast charging
- Overload and short circuit protection
- USB port for remote control
- Compact design


▪ Specification


Model		DS-UPS2000
Power	UPS Capacity	2000 VA / 1200 W
Input	Input Voltage Range	140 VAC to 290 VAC
	Input Frequency	50/60 Hz
Output	Output Voltage Range	210 VAC to 235 VAC
	Output Frequency	50 Hz $\pm$ 0.5 Hz
	Transfer Time	$\leq$ 10 ms
	Waveform	PWM
Battery	Battery Type	12 V/9 Ah *2 pcs
	Recharge Time	6-8 hours recover to 90% capacity
Indicator	Display	LCD Screen Input Voltage, Output Voltage, Battery capacity, load level
	Alarm	Charging Mode (DC mode): Sounding every 8 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding
Interface	Communicate Ports	USB
Protection	Full Protection	Surge protection, Overload protection, Short circuit protection
General	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Operating Humidity	30% to 90% (non-condensing)
	Dimension	345 mm $\times$ 122 mm $\times$ 192 mm (13.58" $\times$ 4.80" $\times$ 7.56")
	Weight	Approx. 11 kg (24.3 lb)

▪ Available Model

DS-UPS2000

▪ Dimension

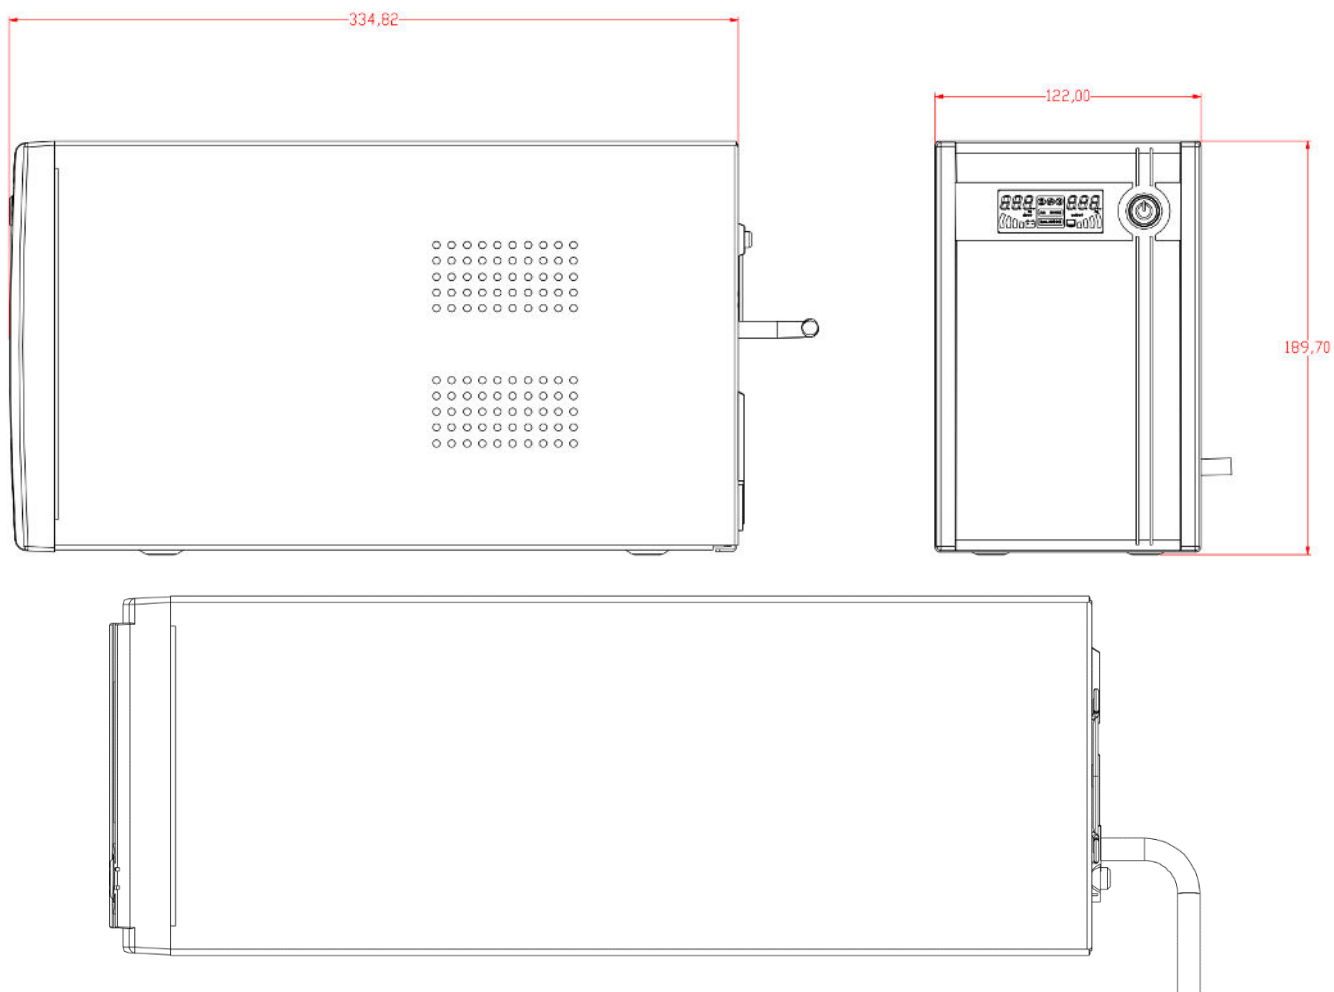

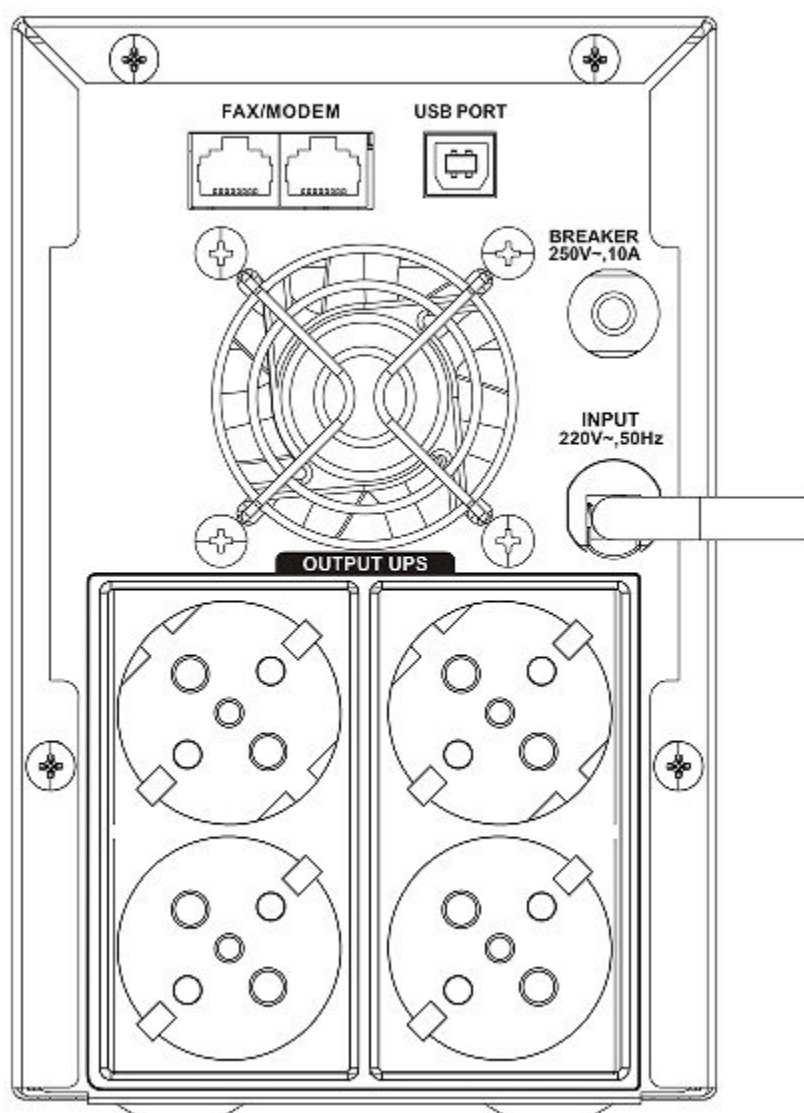

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq